

DR-J2-F2A Data Sheet v1.5

X Pol,1710-2690MHz

65 Horizontal Beamwidth,18.0dBi

E-tilt:2-12

1.4m 2-Port 1M Antenna with Integrated RCU

Electrical Properties(BASTA 11.1)


Frequency Band(MHz)	1710-2690(Y1)			
	1710-1990	1920-2200	2300-2400	2490-2690
Polarization	±45			
Gain(dBi)	17.0±0.5	17.3±0.5	17.6±0.5	18.1±0.5
Horizontal 3dB Beam Width(°)	69±5	68±5	65±5	65±5
Vertical 3dB Beam Width(°)	7.4±0.5	6.9±0.6	6.3±0.4	5.7±0.5
Front to Back Ratio at 180±30°(dB)	25	25	25	25
Cross Polar Ratio at 0°(dB)	18	18	18	18
Cross Polar Ratio Sector ±60°(dB)	10	10	10	10
1st Upper Sidelobe Suppression(dB)	16	16	16	16
Electrical Downtilt(°)	2-12			
VSWR	< 1.5			
Cross-polar Isolation(dB)	>28			
3rd Order PIM(dBc)	< -153@2 x 43 dBm			
Impedance(Ω)	50			
Power Handling(W)	250			

Mechanical Specifications


Antenna Dimensions (HxWxD) (mm)	1370 x 160 x 115
Packing Dimensions (HxWxD) (mm)	1530 x 250 x 220
Lightning Protection	DC Ground
Antenna Weight (kg)	8.0
Packed Weight (kg)	12.7
Connector	2 x 4.3-10 Female
Radome Material	Fiberglass
Wind Load at 150 km/h(N) (Front /Rear/Side)	301/317/228
Maximum Wind Speed(km/h)	241
Diameter of Installation Pole(mm)	Φ40-Φ90
Operating Temperature Range(°C)	-40-+65
RET Type	Integrated RCU
RET Protocols	AISG 2.0/3GPP



Pattern sample for reference

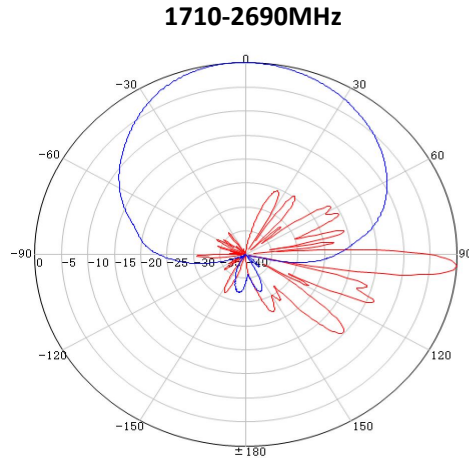

Layout of interface

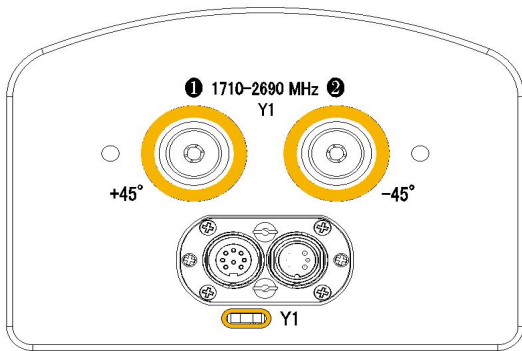

Array ID	RF Connector	RET(S)	Frequency(MHz)	AISG RET UID
Y1	1-2	1	1710-2690	MKxxxxxxxxxxxxxxxxY1

* For more information, please refer to the specification of RET.

Accessories

Item	Item	Weight	Mechanical Tilt Range	Quantity
Mounting Kit	MJM-014-1101A	3.0kg	0-10°	1